


Features

- 1A,3A Carrying current
- Subminiature
- DIP standard terminals Au-clad contacts

PCB Relay

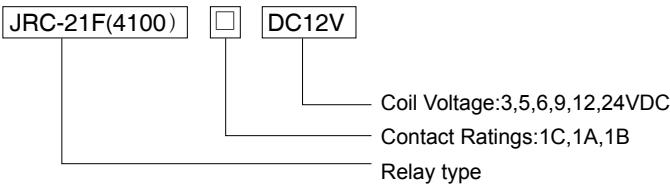

Contact Ratings

Contact Ratings	1C	1A	1B
Contact Resistance	50MΩ (1A 6VDC)		
Contact Material	Silver Alloy		
Contact Capacity	3A 125VAC/24VDC		

Specification

Insulation Resistance	100MΩ .500VDC		
Dielectric Strength	BCC	1000V	1min
	BOC	500V	1min
Operate Time	5ms/5ms		
Terminal Type	PCB		



JRC-21F(4100)


Coil Ratings

Nominal Coil Power	0.15W, 0.2W, 0.36W
--------------------	--------------------

Coil Versions

Nominal Voltage VDC	Coil Resistance at 20° C ± 10% (Ω)			Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.15W	0.2W	0.36W			
3	60	45	25	2.25	0.3	3.9
5	167	120	70	3.75	0.5	6.5
6	240	180	100	4.50	0.6	7.8
9	540	400	220	6.75	0.9	11.7
12	960	720	400	9.00	1.2	15.6
24	3840	2880	1600	18.00	2.4	31.2

Dimension.Bottom View

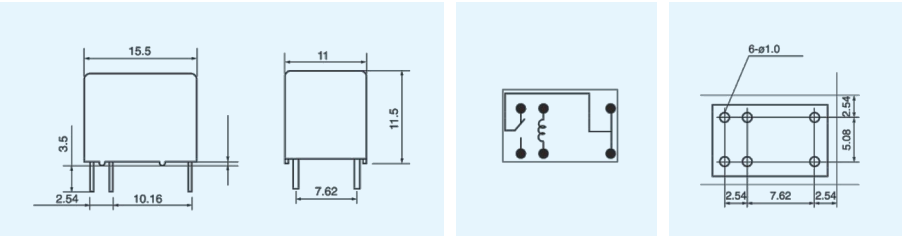

Reference Data

