Features

- Outlet Teminal of swift connection type
- Suitable for control of kinds of circuits
- Excellent shake resistance performance
- With couple socket



JD1929

Automotive Relay

JD1929 | 1H | DC12V

- DC12V — Coil Voltage:5,6,9,12,24VDC
- 1H — Contact Ratings:1H:1N/O 1Z:1C/O
- JD1929 — Relay type

Contact Ratings

Contact Ratings	1Z	1H
Contact Resistance	50MΩ (1A 6VDC)	
Contact Material	AgCdO	
Contact Capacity	20A 250VAC/30VDC	30A 250VAC/30VDC

Specification

Insulation Resistance	100MΩ.500VDC		
Dielectric Strength	BCC	500V	1min
	BOC	500V	1min
Operate Time	15ms/10ms		
Terminal Type	Terminal mounting		


Coil Ratings


Nominal Coil Power	1.6W

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%
5	3.50	0.50	14
6	4.20	0.60	18
12	8.40	1.20	80
24	16.8	2.40	324

Dimension.Bottom View

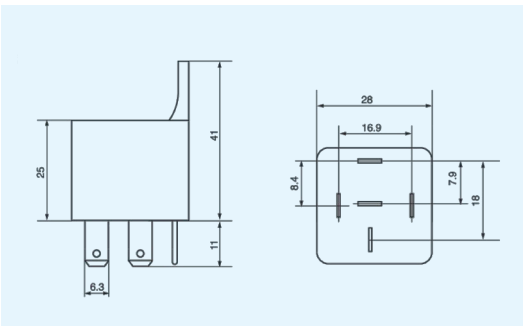

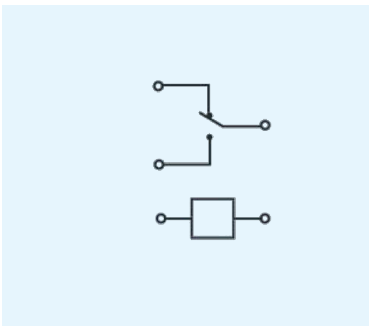

Reference Data

